



峨眉山维恩微波技术有限公司

Emei Wain Microwave Technology Co., LTD.

DIRECTIONAL COUPLERS

1. Model Number : C41830A

2. SPECIFICATIONS

FREQUENCY RANGE : 4-18 GHz

COUPLING : 30 ± 1 dB

Frequency Sensitivity : ± 0.5 dB

DIRECTIVITY : ≥ 15 dB 4-12.4 GHz
 ≥ 14 dB 12.4-18 GHz

MAXIMUM VSWR (any port) 1.50


INSERTION LOSS (includes coupled power) ≤ 0.7 dB

POWER RATING (input) : Average 20W Peak 3kW

STANDARD CONNECTORS : SMA Female

OPERATING TEMPERATURE : -55°C - $+85^{\circ}\text{C}$

3. DIMENSIONS : mm

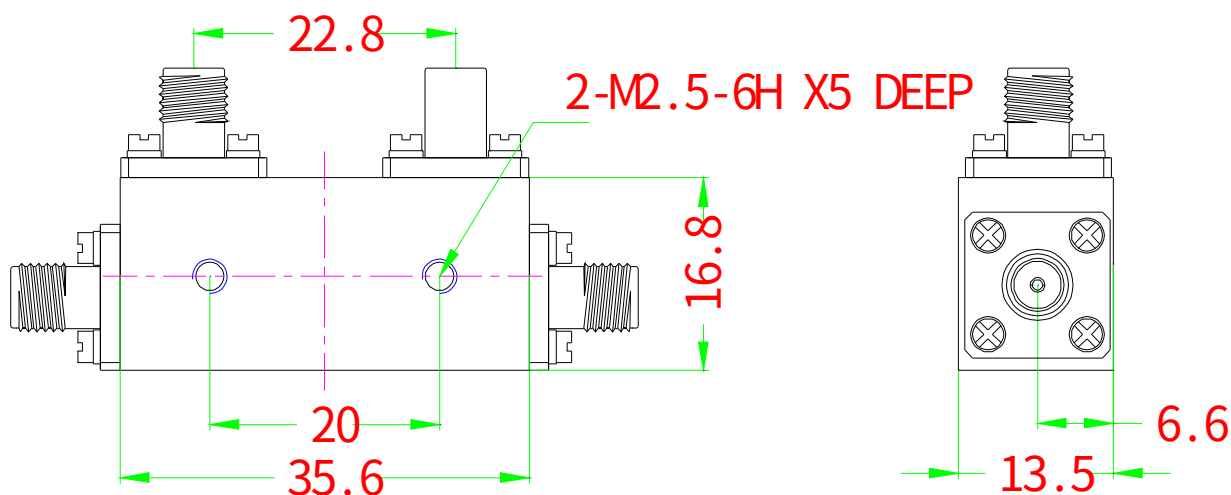

地址：四川省峨眉山市景秀路1号
传真：0833-5564780
主页：www.wain-microwave.com
邮箱：sales@wain-microwave.com

Add : No.1 Jingxiu Rd, Emei, Sichuan, China
Fax : 86-0833-5564780
Web : www.wain-microwave.com
Email : sales@wain-microwave.com